



IS4110 Non-Decode Model
Original Dimensions



IS4100 ScanQuest®

Features

- **Patented automatic trigger or RS232 controlled activation**
- **Long-range/short-range activation modes**
- **Autodiscriminates all standard bar codes**
- **Bar code or serial programming**
- **Low power consumption**

IS4100 ScanQuest® engines are miniature laser scanners with maximum scanning capabilities. With a patented automatic trigger, ScanQuest provides accurate scanning quickly and reliably.

Designed for integration into OEM equipment, ScanQuest engines are compact, lightweight and have low power requirements. Any equipment designed to incorporate bar code identification can utilize the ScanQuest engine - the applications are endless.

ScanQuest engines are offered in two models: the IS4120 and the IS4110. The IS4120 has built-in decoding for versatile OEM operations, while the IS4110 non-decode version interfaces directly with

decode-equipped OEM devices. High density and extra wide code scanners are also available.

Note: Approval and certification from agencies such as the FDA (Food and Drug Administration) must be obtained by the manufacturer of the end equipment. The specifications required for agency approval are not obtainable until the ScanQuest engine is used in its final configuration. Therefore, it becomes the responsibility of the manufacturer who incorporates the scan engines into their product to comply with all federal laser safety regulations. The manufacturer must submit a Laser Product Report for the FDA in the U.S. or similar forms as required by other countries. Metrologic can assist its customers in complying with the necessary procedures.



IS4100 ScanQuest®

OPERATIONAL

Light Source	Visible Laser Diode 675 nm ± 5 nm
Laser Power	0.800 mW (peak)
Depth of Scan Field*	12.7 mm - 200 mm (0.5" - 8")
Width of Scan	28.6 mm (1.125") @ face; 101.6 mm (4") @ 76.2 mm (3")
Scan Speed	52 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.17 mm (6.8 mil)
Decode Capability	IS4120: Autodiscriminates all standard bar codes IS4110: None
System Interfaces	IS4120: RS232, Light Pen Emulation, PC Keyboard Wedge, Stand Alone Keyboard IS4110: Decode dependent
Print Contrast	35% minimum reflectance difference
Number Characters Read	IS4120: Up to 80 data characters read IS4110: Decode limited
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	IS4120: Power on; good read signals IS4110: Decode limited
Indicators (LED)	IS4120: Laser on; good read signals IS4110: Decode limited

MECHANICAL

Dimensions	IS4120: 45.7 mm x 40.6 mm x 18.5 mm (1.8" x 1.6" x 0.73") 7IS4110: 45.7 mm x 40.6 mm x 14 mm (1.8" x 1.6" x 0.55")
Weight	IS4120: 55 g (1.94 oz) IS4110: 45 g (1.77 oz)
Termination	IS4120: 12 pin ZIF connector IS4110: 10 pin ZIF connector

ELECTRICAL

Input Voltage	5 VDC ± 0.25 V
Power	IS4120: 0.625 W IS4110: 0.375 W
Operating Current	IS4120: 125 mA typical @ 5 VDC IS4110: 75 mA typical @ 5 VDC
Standby Current	IS4120: 65 mA typical @ 5 VDC IS4110: 1.7 mA typical @ 5 VDC
Sleep Mode Current	IS4120: 9 mA typical @ 5 VDC IS4110: Not available
Laser Class	Designed to be used as a CDRH:Class II and IEC Class 2 component
EMC	FCC Class A, CISPR Class A

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	4844 Lux
Contaminants	Environment dependent
Ventilation	Environment dependent
Certification	UL recognized component

*Bar code dependent.
Specifications subject to change without notice.
Printed in Germany, April 2000
E&OE



USA
Metrologic Instruments, Inc.
Tel. 1-800-ID-METRO
Fax 1-609-228-6673
info@metrologic.com

South America
Metrologic Instruments
Tel. 55-11-5505-6568
Fax 55-11-5505-1681
info@sa.metrologic.com

Brazil
Metrologic do Brasil Ltda
Tel. 55-11-5505-2396
Fax 55-11-5507-2301
info@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd
Tel. 65-842-7155
Fax 65-842-7166
info@sg.metrologic.com

Metrologic Instruments GmbH | Dornierstrasse 2 | 82178 Puchheim, Germany
Tel: +49 (0) 89 89 019 0 | Fax: +49 (0) 89 89 019 200 | Email: info@europe.metrologic.com



REGIONAL OFFICES

Germany
Metrologic Instruments GmbH
Dornierstrasse 2, 82178 Puchheim
Tel: +49 (0) 89 89 019 0
Fax: +49 (0) 89 89 019 200
Email: info@de.metrologic.com
www.metrologic-instruments.de


Italy
Metrologic Instruments Italia s.r.l.
Via Emilia 68, 40064 Ozzano dell'Emilia (BO)
Tel: +39 (0) 5 16 51 19 78
Fax: +39 (0) 5 16 52 13 37
Email: info@it.metrologic.com

Spain
Metrologic Eria Ibérica
Julián Camarillo 29, Edificio Diapasón, 28037 Madrid
Tel: +34 (91) 3 27 24 00
Fax: +34 (91) 3 27 38 29
Email: info@es.metrologic.com
www.metrologic.es

Dimensions

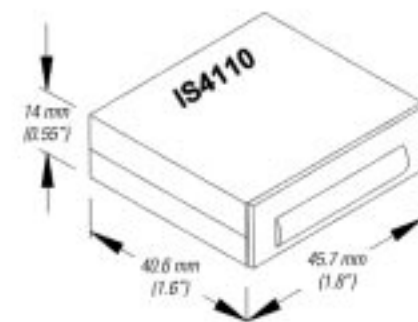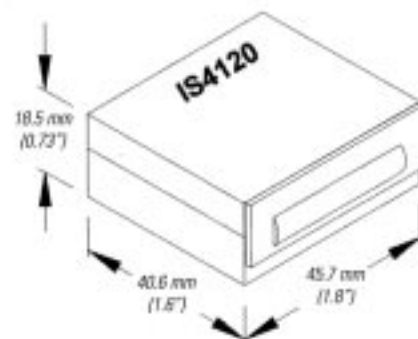


Scan Area

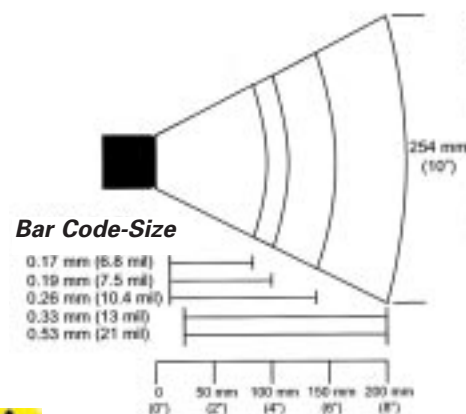

Bar Code-Size

0.17 mm (6.8 mil)
0.19 mm (7.5 mil)
0.26 mm (10.4 mil)
0.33 mm (13 mil)
0.53 mm (21 mil)



Metrologic®

www.europe.metrologic.com